

## Elisa Operator Broadband Services

Elisa Operator Broadband Services comprise wholesale-level bitstream data subscriptions classified as broadband services by the Finnish Communications. Client subscriptions are delivered from Elisa's subscriber switches to a NNI (Network-to-Network Interface) connection point between Elisa and another operator (see "Elisa Network-to-Network interconnection (NNI)").

Broadband services are delivered with Subscription-specific VLAN by default. Additionally this VLAN type can be changed to other VLAN types, example Subscription-specific VLAN. Multi VLAN type can be used to deliver total of four (4) VLAN connections to same subscription. Q-in-Q VLAN type activates two stacked vlan identifiers. This enable unlimited lower vlan usage to the subscription. The number of MAC addresses in a single subscriber port is limited to sixteen (16) when using Subscription-specific VLAN, Multi VLAN or Q-in-Q identifier.

Operator Broadband subscriptions support Ethernet frames pertaining to IEEE802.3. The maximum transmission unit (MTU) supported in the frame is 1,500 bytes. With Q-in-Q VLAN service maximum transmission unit (MTU) supported in the frame is 1,608 bytes. The subscriber port of Operator Broadband Services does not include 802.1Q support.

Operator Broadband Services are delivered to the NNI of the subscribing operator customer as an L2-level connection. Operator Broadband Services are intended for a single end customer, and their distribution to several end users or buildings/flats is prohibited.

### Technologies, distribution centres and delivery interfaces

Each Elisa Operator Broadband Service is implemented using any of the following network technologies:

- VDSL2
- G.FAST
- ETHERNET

The services are mainly built from the distribution centre which is closest to the customer. The available distribution centres are in the following locations:


- Fiber to the Building (FTTB)
- Fiber to the Home (FTTH)

Services implemented from the building's main distribution frame require an internal copper network (VDSL2- and G.fast technology), general cabling (ETHERNET) or fiber cabling (ETHERNET FIBER). FTTB subscriptions cannot be delivered to the building's main distribution frame; instead, the order must always indicate the house identifier or number to which the service is to be delivered.

Services implemented from apartment's ethernet switch (FTTH) are offered directly from the fibre switch port (ETHERNET) in the house.

The faultless operation of subscriptions implemented using the ETHERNET technology requires general Ethernet cabling following at least the Cat 5e Ethernet standard.

## Delivery interfaces for Elisa Operator Broadband Services

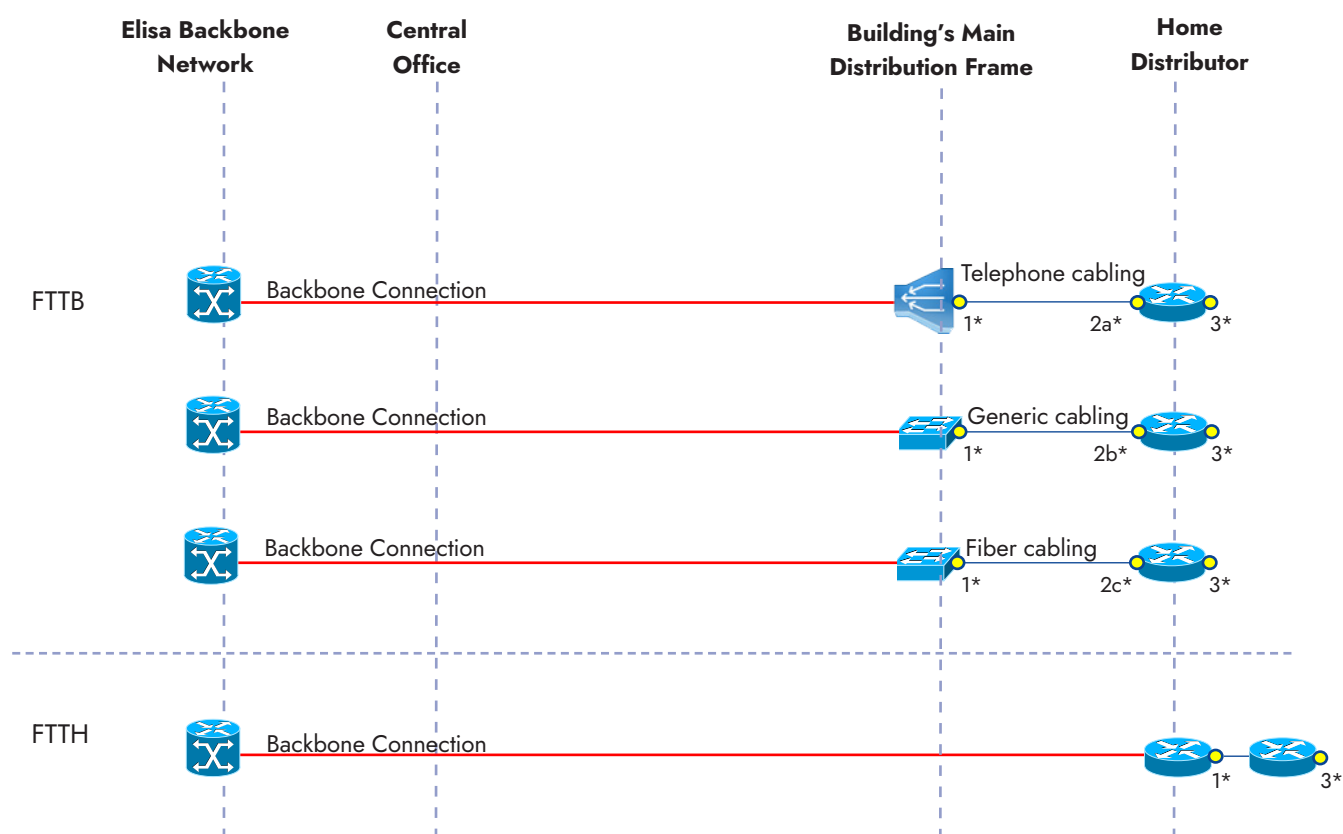

1\* Operator broadband port

2a\* Connection to the internal network installed in a telephone socket (3-pin telephone socket/RJ11)

2b\* Connection to the internal network installed in a general cable socket (RJ45)

2c\* Connection to the internal network installed in a fiber interface

3\* Customer premises equipment (RJ45)

## Subscription-specific VLAN

Operator customers can use VLAN identifiers for single subscriptions. The VLAN identifier is subscription-specific and a single VLAN identifier cannot be ordered for several subscriptions located in a single NNI. When ordering a user subscription, operator customers provide information about the VLAN identifier to which the ordered user subscription is forwarded in the NNI connection.

Subscriptions including a subscription-specific VLAN identifier can be delivered to a NNI located in the same service area or to another NNI of the same operator located in any other service area for an extra charge (see "Transferring a subscription from one service area to another" in the price list).

### Subscription-specific VLAN

VLAN identifiers	20-4092
------------------	---------

## Multi VLAN

Operator customer can use multiple subscription-specific VLAN identifiers in a single broadband subscription using Multi VLAN service. Maximum VLAN identifier count for a single subscription is 4. In VDSL2 and Ethernet technologies first VLAN identifier is transferred to CPE without VLAN tag (untagged) and others with VLAN tag (tagged).

VLAN tags used in Multi VLAN subscriptions are confirmed in order acknowledgement. VLAN's used in Multi VLAN service have same rules and restrictions as broadband subscriptions with a single subscription-specific VLAN. MultiVLAN service has limited availability. Availability is based on the technology used in destination address.

## Q-in-Q VLAN

Operator customer can order Q-in-Q VLAN service to transfer stacked vlan identifiers through broadband subscription. Upper VLAN tag (S-tag) is used to identify subscription. Lower VLAN tag (C-Tag) is part of customers traffic and can be used freely. Subscription with Q-in-Q VLAN service has MTU size of 1608 bytes.

Broadband subscriptions with Q-in-Q VLAN service have same have same rules and restrictions as broadband subscriptions with a single connection-specific VLAN. Q-in-Q VLAN service has limited availability. Availability is based on the technology used in destination address.

## VULA VLAN

Operator customer can order Virtual unbundled local access (VULA) by choosing VULA VLAN type with operator broadband service. VULA VLAN type changes the operator broadband service to VULA Service. VULA Services are delivered to nearest CO (Central Office) location equipped with VULA-NNI. More information about VULA services at Virtual unbundled local access (VULA) service description.

## SLA Service Levels

The Service Levels are:

Service Level Category	Service Hours Category	Response Time	Repair Time
POV8	P0: Mon-Fri 8 am-4pm	8 h	24 h
P1K12	P1: Mon-Fri 7 am-6 pm	1 h	12 h

Elisa Operator Broadband doesn't include by default any SLA category.

**Service hours** refer to the time when fault limitation and repair measures will be carried out.

**Response time** refers to the time within which actions according to a service request will be started.

**Repair time** refers to the time within which a fault has been repaired.

The content and application of the service levels are described in more detail in the Elisa SLA service description.

## Core network transfer service

Core network transfer service is available to the connections with Subscriber VLAN, Multi VLAN and Q-in-Q VLAN. Core network transfer service is an additional service subject to an extra charge. Core network transfer service is automatically added to a subscriptions where subscription and NNI connection are located in different service areas.

## Elisa Network-to-Network interconnection (NNI)

Ordering and delivering of Elisa Operator Broadband product requires a working and applicable Network-to-Network interconnection between Elisa and ordering operator customer. Applicable types of NNI service are Broadband NNI and Multi NNI. The Elisa NNI connection enables the visibility of no more than 500 MAC addresses from the network of the operator customer towards Elisa's network. Any Spanning Tree protocol messages received by the connection are filtered out. Operator broadband services and additional services have dependencies with Elisa NNI service location and can be service area specific. Additional information: See Elisa Network-to-Network Service description, Elisa Service areas.

## Service areas

For service areas of the Elisa trunk network, see appendix "[Elisa's service areas.](#)"

## Customer premises equipment

Delivery interfaces of customer premises equipment (CPE) connected to the operator broadband network comply with the following recommendations:

VDSL2	ITU-T G.993.2 annex B profile 17a
G.FAST	ITU T G.9701
ETHERNET	IEEE 802.3 10Base-TX/100Base-TX/1000Base-TX
FIBER	IEEE 802.3 1000BASE-BX10-U (SM, TX 1310nm RX 1490nm)

## Ordering and delivery time

Orders and offers are placed through the Elisa Carrier Service Online order and delivery system. A pricing zone and service area information as well as technologies, speeds and vlan types available are mentioned in an availability enquiry, offer request and order. Final availability to all products are check when ordered or requested a quote. The target delivery time is 1-2 weeks in Elisa's own existing network area.

## Network monitoring and fault repair

The targeted repair time is 24 hours from the receiving of the fault notification. The repair is carried out during the service hours. The service hours are workdays Mon – Fri from 8 am to 4 pm. Fault repair can be continued after the service hours if ordered separately by the customer. Measures are launched immediately to repair any failure or faults in Elisa's backbone network, including concentrating central NNI's.

Fault notifications should be made through the Elisa Carrier Services Online order and delivery system or by phone to the Service Desk (24h), service in English tel. +358 10 26 096, service in Finnish tel. +358 10 804 400.

## Elisa's network maintenance and change work timetable

Elisa will perform scheduled network maintenance and change work on the second and fourth Wednesday each month at 00:30 a.m.–05:30 a.m. Elisa reserves the right to perform network maintenance and change work as needed. The maintenance and change work are attempted to announce in advance and to minimize outage and downtime of the services.

## Prerequisites and restrictions

The customer is responsible for ensuring that the condition of the internal network in each installation location allows for the installation of the Operator Broadband Service:

- Copper cabling from the building distribution centre to the final installation location
- Power supply (230V AC) for any network terminal
- Sufficient rack or shelf space for any network terminal
- Ambient conditions suitable for electrical equipment

The price of the service is subject to the following restrictions:

- The prices are only valid on the precondition that a connection to the customer's building exists and a new network need not be constructed.

There may be regional differences in the availability of subscriptions and additional services.

## Data protection

Personal data is processed in the service, such as installation addresses and contact details for the onsite persons. The personal data is processed for service implementation. Concerning the personal data processed in the service, the telecommunications operator, that is ordering the service is the personal data controller stated in the data protection legislation and Elisa is the processor.

In addition, service information is stored in the form of logs due to failure repairs and prevent information security threats. For this information, Elisa is a data controller for data protection legislation.

Personal data processed in the service can be processed outside the EU / EEA area. Elisa ensures that in a country where personal data is processed, the level of data protection is adequate and in accordance with the European Commission's decision, or alternatively, that the transfer is subject to a legally appropriate safeguard measure such as a data transfer agreement in accordance with the EU standard contractual clauses on the transfer of personal data outside the EEA.

Elisa has the right to use subcontractors in the provision of services and in the processing of personal data.

## Terms of agreement

The service is governed by the general agreement terms of operator products of Elisa Corporation. The Service Description is valid from 1 September 2025.